



Laying the Foundation
for Tomorrow

Flooring & Concrete Moisture Prevention Systems

High Performance Concrete Moisture Prevention Admixture

Concure Systems Admixture is designed to stop flooring failures due to moisture migration through and out of below-grade, on-grade and above-grade slabs.


Available in SILICATE FREE

No limits: up to 100% Rh or 50 lbs. CC (if tested).

Concure Systems Admixture Benefits:

- **LIFETIME** warranty; covering treating affected area with Concure Systems Vapor Barrier Plus, including finish flooring / coatings, patching compounds, adhesives and labor.
- Nearly 3 Decades without a single failure.
- Does NOT require use of an underslab vapor retarder/barrier
- **INTEGRAL** in the slab and **NEVER** requires topical sealing.
- **FRACTION** of cost to use versus topical suppressants.
- Flooring can usually be installed 30 days after pouring the concrete
- Eliminates moisture problem **PERMANENTLY!**
- Compatible with ALL floor coverings, coatings and approved adhesives for non-porous substrates
- Densifies concrete and contributes to increased concrete strength up to 125%
- Stops ASR (Alkali-Silica-Reactivity)
- Contributes to blocking radon gas
- Works as a shrink reducing admix (SRA)
- Eliminates surface dusting
- Reduces and in some cases eliminates most slab curling due to uneven slab curing
- Minimizes spawling and surface cracks
- Eliminates efflorescence
- **Extended Bond/Adhesion Warranty Available (see website for details)**

With Concure Systems Admixture, the concrete becomes a vapor barrier !

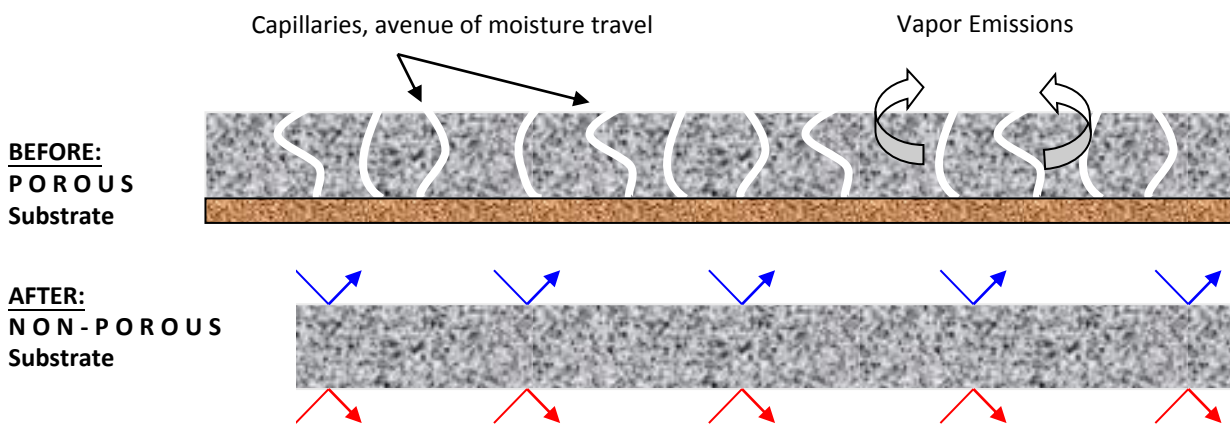

Main Office: Emil Pikula - (480) 820 7171 / E M I L @ C O N C U R E S Y S T E M S . C O M Contact your local representative for additional information